




L J Q X - 5 9 Q X D 5 I 9 F Q X - 6 3 F、L J Q X - 8 0 F 系列

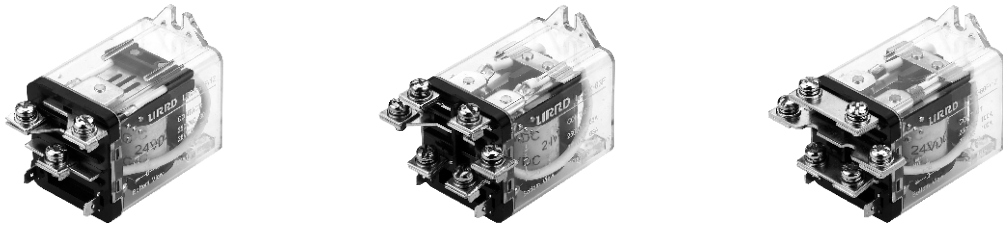



产品型号		LJQX-59F	LJQX-59FD	LJQX-63F	LJQX-80F
外形尺寸(毫米)		80.5 × 45.0 × 71.5	80.5 × 45.0 × 71.5	80.5 × 62.0 × 71.5	80.5 × 62.0 × 71.5
触点形式		1Z 1H 1D	1Z 1H 1D	2Z 2H 2D	1Z 1H 1D
触点材料		银合金			
触点容量阻性		80A/28VDC/250AC	120A/28VDC/250AC	60A/28VDC/250AC	100A/28VDC/250AC
线圈功率	DC(W)	4.8W			
	AC(VA)	7.5VA			
线圈电压	DC(V)	6~220V			
	AC(V)	6~380V			
吸合电压		DC 75% AC 80%			
释放电压		DC 10% AC 30%			
最大电压		110%			
接触电阻		100m			
介质耐压	开路触点间	1500VAC 50Hz/1min 漏电流			
	触点组间	2000VAC 50Hz/1min 漏电流			
	线圈触点间	2500VAC 50Hz/1min 漏电流			
绝缘电阻		1000M			
工作寿命	电气(次) Electrical	10 ⁵ Times(频率:通1次/1S,断1次/1S)			
	机械(次) Mechanical	10 ⁶ Times(频率:300次/1min)			
环境温度		-25 ~+55			
引出端形式		螺丝端子式 S			
配用插座		/			
产品重量(g)		235g	270g	230g	275g
同类型参照					

备注：安装时请不要把产品接线面向上，以免灰尘进入，影响继电器正常工作。



L J Q X - 5 9 Q X D 5 安装尺寸

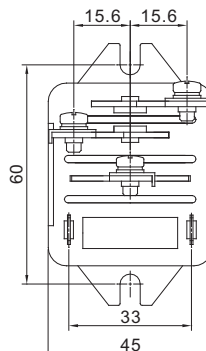


L J Q X - 6 3 F 安装尺寸

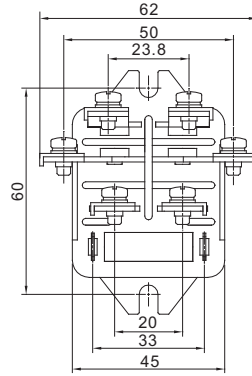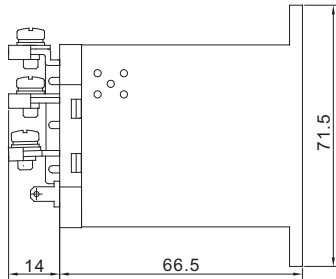


L J Q X - 8 0 F 安装尺寸

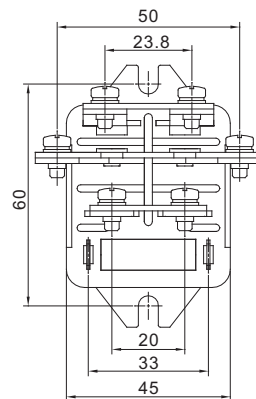


产品安装尺寸和接线图



LJQX-59F/1Z
LJQX-59FD/1Z



LJQX-63F/2Z



LJQX-80F/1Z

