







LJQX - 38F 系列 Series




产品型号		LJQX-38F	LJQX-38F/T
外形尺寸(毫米)		55.4 × 41.5 × 49.1	67.6 × 37.4 × 57.3
触点形式		3Z 3H 3D	3Z 3H 3D
触点材料		银合金	
触点容量阻性		30A/40A/28VDC 30A/40A/250VAC	
线圈功率	DC(W)	< 1.5W	
	AC(VA)	< 2.5VA	
线圈电压	DC(V)	6~220V	
	AC(V)	6~380V	
吸合电压		DC 75% AC 80%	
释放电压		DC 10% AC 30%	
最大电压		110%	
接触电阻		100m	
介质耐压	开路触点间	1200VAC 50Hz/1min 漏电流 Leakage current 1mA	
	触点组间	1500VAC 50Hz/1min 漏电流 Leakage current 1mA	
	线圈触点间	1500VAC 50Hz/1min 漏电流 Leakage current 1mA	
绝缘电阻		1000M	
工作寿命	电气(次)	10 ⁵ Times(频率Frequency : 通On1次Time/1S, 断Off1次Time/1S)	
	机械(次)	10 ⁶ Times(频率Frequency : 300次Time/1min)	
环境温度		-25 ~+55	
引出端形式		插入式Insert type	焊接式Welding type
配用插座		38F11A	
产品重量(g)		130g	135g
同类型参照			

LJQX - 38F 安装尺寸和接线图



L J Q X - 3 8 F 接引线式

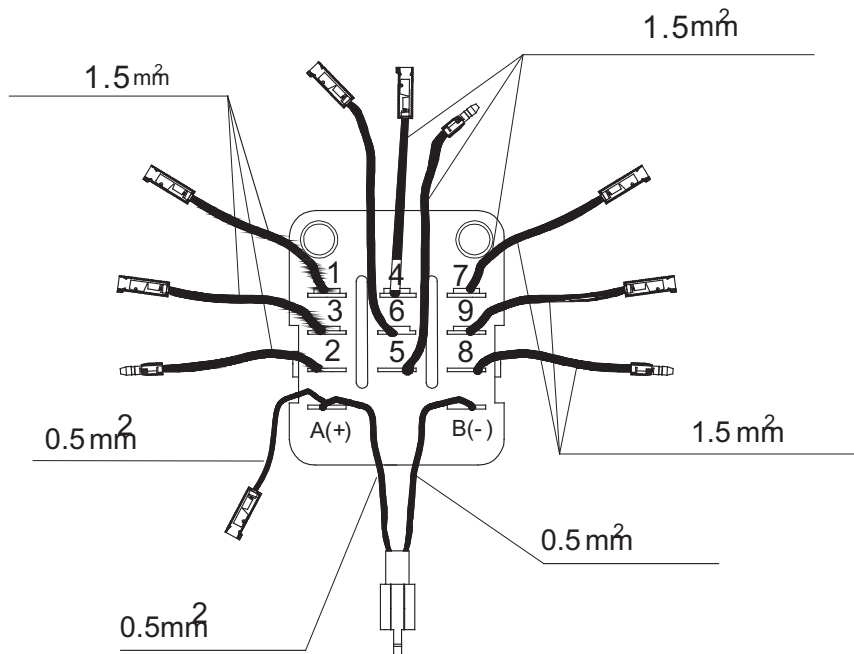

L J Q X - 3 8 F T 安装尺寸和接线图

