



L h 3 系列






类别	多段式时间继电器Multi Time Relay		多段式时间继电器Multi Time Relay				
型号	LH3CT		LH3BA				
外形尺寸(毫米)	48.0H × 48.0W × 95.0L		48.0H × 48.0W × 95.0L				
时间范围	B:1S,10S,1M,10M C:3S,30S,3M,30M D:1M,10M,1HR,10HR E:3M,30M,3HR,30HR		SEC:0.5,1.5,10 MIN:0.5,1.5,10 HR:0.5,1.5,10,50,100				
额定电压	AC:24V-48V-110V-220V-240V DC:12V-24V-48V 24 to 240V DC/AC		AC:24V-48V-110V-220V-240V DC:12V-24V-48V 24 to 240V DC/AC				
指示灯动作	ON-Green UP-Red ON-绿灯 UP-红灯		计时中闪烁指示				
O/P输出接点	型号	LH3CT-8A	LH3CT-8H	LH3CT-8C	LH3BA	LH3BA-8	LH3BA-8H
	限时	5A	5A		5A	5A	5A
	限时			5A			
	瞬时		5A				5A
寿命	机械	1 × 10 ⁷ Times					
	电气	1 × 10 ⁵ Times					
精确度	往复误差	± 2% max.					
	设定误差	± 5% max.					
	电压误差	± 5% max.					
	温度误差	± 2% max.					
复位时间	0.1sec max.						
消耗功率	24-240V AC:About 15VA, 12-48V DC:About 2W, 24 to 240V DC/AC:About 10VA						
使用周围温度	-10 ~+55						
使用周围湿度	35~85%RH						
重量	100g						
安装于其底座	露出	PF08A-E		PYF113A-E			
	埋入型	US-08 or P3G-08		US-11			




L h 3 安装尺寸

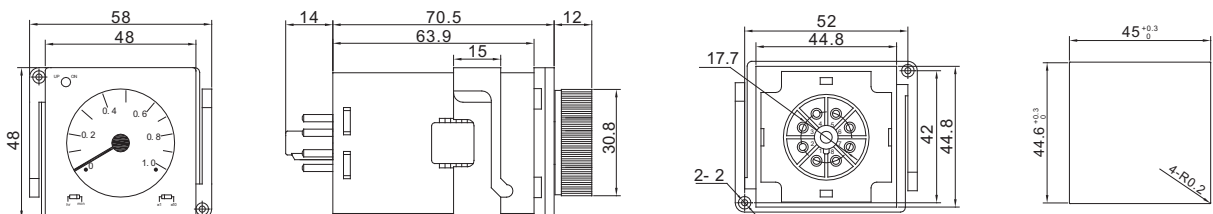




LH3CT 接线图



LH3CT 时序图



LH3BA 接线图

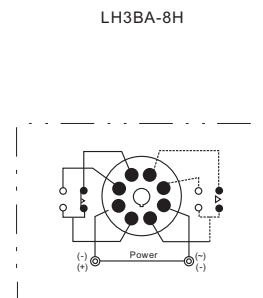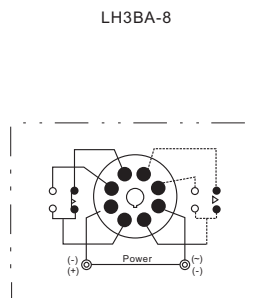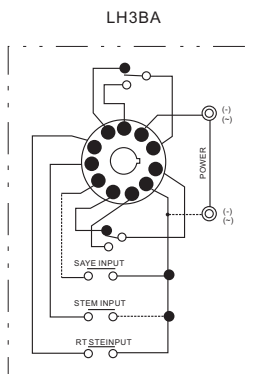

LH3BA 时序图

