


LH3YN 系列




类别	时间继电器				
型号	LH3YN-(ST6P)				
外形尺寸(毫米)	28.0H x 21.5W x 63.0L				
时间范围	0.1S ~ 10min 0n1min ~ 100rS ~ 10m 0.1min ~ 10hrs				
额定电压	AC: 2V-24V-10/2 20V DC: 240V-380V 50/60Hz DC: 12V-24V				
指示灯动作	Power, up 指示				
O/P输出接点	型号	H3YN-2	H3YN-21	H3YN-4	H3YN-41
	限时 4C			3A(4C)	3A(4C)
	限时 2C	5A	5A		
寿命	机械	5x10 <sup>6</sup> Times			
	电气	10 <sup>6</sup> Times			
精确度	往复误差	±3% max.			
	设定误差	±10% max ±50ms (最大刻度时间下)			
	电压误差	±2% max.			
	温度误差	±5% max.			
复位时间	0.2sec max.				
消耗功率	3VA				
使用周围温度	-10 ~ +55				
使用周围湿度	48 ~ 85%RH				
重量	45g				
安装于其底座	露出	PYF08A	PYF08A	PYF14A	PYF14A
	埋入型	With Y-20 adapter			


LH3YN 时序图

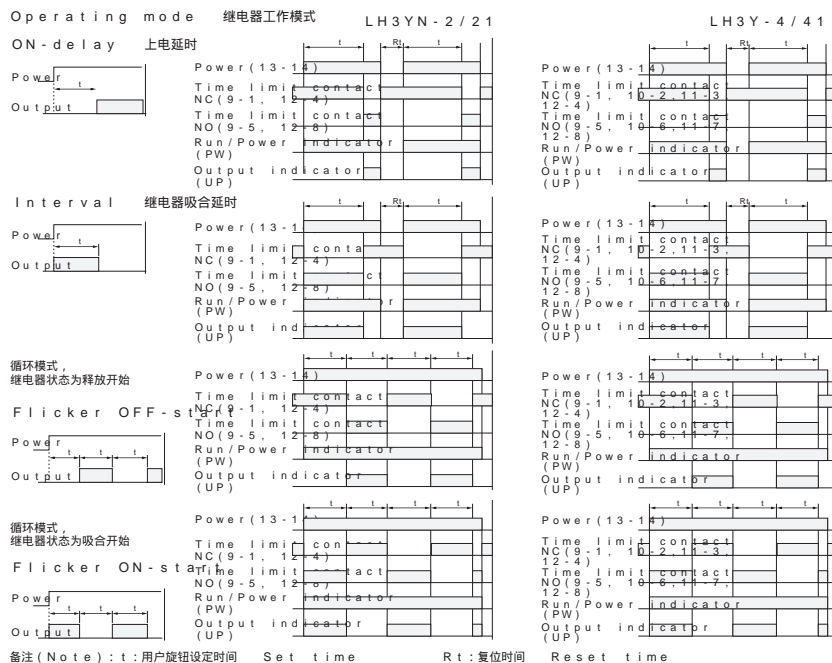


LH3Y L43Y 安装尺寸

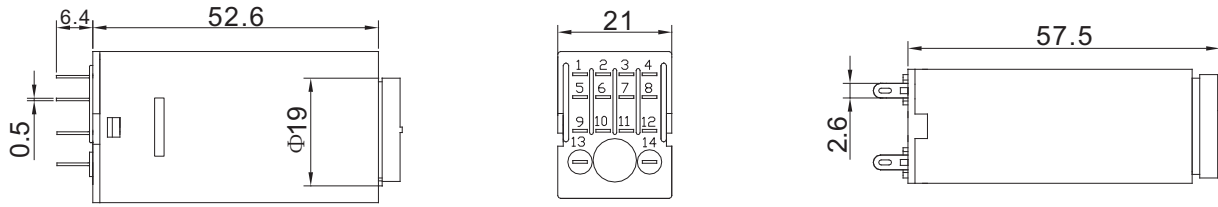

LH3Y L43Y 接线图

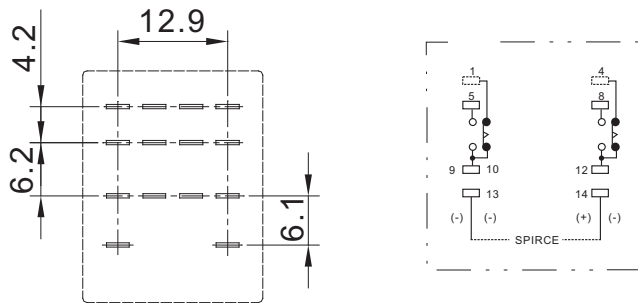

LH3Y L43Y4 安装尺寸

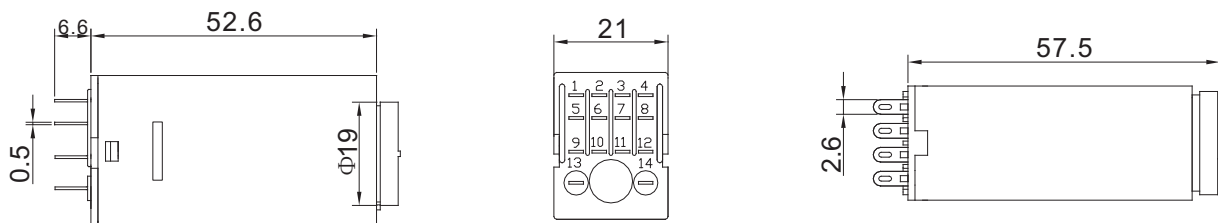

LH3Y L43Y4 接线图

