



## LJQX-60F Series

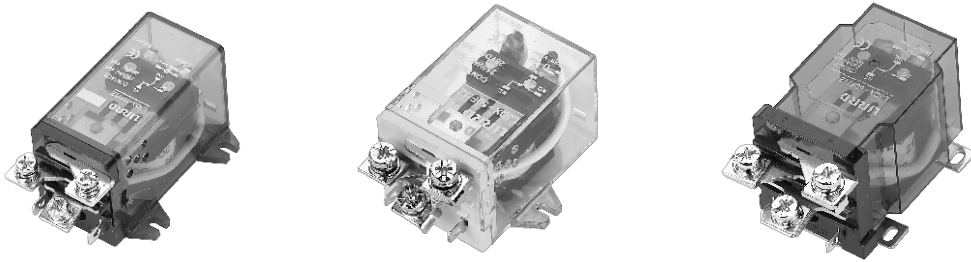


Model	LJQX-45F	LJQX-50F	LJQX-60F	LJQX-68F
Dimension(mm)	76×46×38	72×40×37.9	78×46×46.5	78×46×46.5
Contact Form	1Z 1H 1D	1Z 1H 1D	1Z 1H 1D	1Z 1H 1D
Contact Material	Silver alloy	Silver alloy	Silver alloy	Silver alloy
Resistance Performance Of Contactor Capacity	40A/28VDC/250VAC	50A/28VDC/250VAC	60A/28VDC/250VAC	80A/28VDC/250VAC
Coil Power at 23°C	DC(W)	≤1.5W	≤1.5W	≤1.8W
	AC(VA)	≤2.5VA	≤2.5VA	≤4VA
Coil Voltage	DC(V)	6~220V		
	AC(V)	6~380V		
Pick-up Voltage at 23°C	DC≤75% AC≤80%			
Drop-out Voltage at 23°C	DC≥10% AC≥30%			
Max Voltage at 23°C	110%			
Contact Resistance(at 6VDC 1A)	≤100m Ω			
Dielectric Strength	Between Open Contacts	≥1500VAC 50Hz/1min Leakage current 1mA		
	Contacts pieces			
	Between Coil & Contacts	≥2500VAC 50Hz/1min Leakage current 1mA		
Insulation Resistance(M Ω) at 500VDC	≥1000M Ω			
Service life	Electrical	10 <sup>5</sup> Times(Frequency: On1Time/1S, Off1Time/1S)		
	Mechanical	10 <sup>6</sup> Times(Frequency: 300Time/1min)		
Ambient Temperature	-25°C~+55°C			
Terminal type	Screw Mounting			
Suitable socket	/			
Product Weight	100g	120g	130g	130g
Same Reference				
Protection Type	封闭式 Close type			

## LJQX-45F Installation dimensions

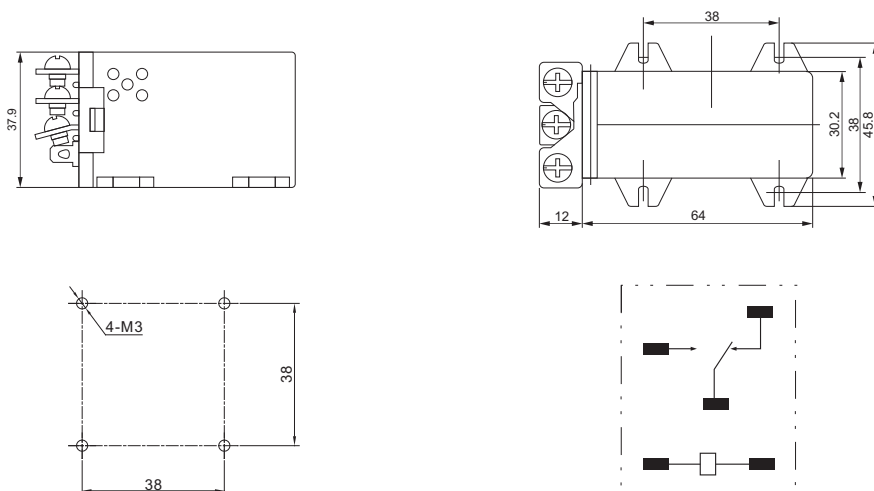

LJQX-50F Installation dimensions

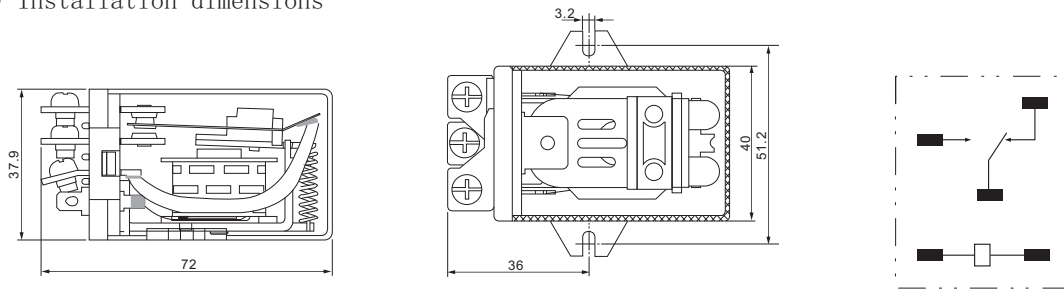

LJQX-60F、LJQX-68F Installation dimensions

