



## Lh3 Series






Classification		Multi Time Relay			Multi Time Relay		
Model		LH3CT			LH3BA		
Dimension(mm)		48.0H × 48.0W × 95.0L			48.0H × 48.0W × 95.0L		
Full Timing Range		B:1S,10S,1M,10M C:3S,30S,3M,30M D:1M,10M,1HR,10HR E:3M,30M,3HR,30HR			SEC:0.5,1.5,10 MIN:0.5,1.5,10 HR:0.5,1.5,10,50,100		
Rated Voltage		AC:24V-48V-110V-220V-240V DC:12V-24V-48V 24 to 240V DC/AC			AC:24V-48V-110V-220V-240V DC:12V-24V-48V 24 to 240V DC/AC		
Indicator Operating		ON-Green UP-Red			Time Operating Flicker		
O/P Contact	Model	LH3CT-8A	LH3CT-8H	LH3CT-8C	LH3BA	LH3BA-8	LH3BA-8H
	1C Time Limit	5A	5A				5A
	2C Time Limit			5A	5A	5A	
	1C Instantaneous		5A				5A
Service life	Mechanical	1 × 10 <sup>7</sup> Times					
	Electrical	1 × 10 <sup>5</sup> Times					
Accuracy	Repeat Error	±2% max.					
	Setting Error	±5% max.					
	Voltage Error	±5% max.					
	Temp Error	±2% max.					
Reset Time		0.1sec max.					
Power consumption		24-240V AC:About 15VA, 12-48V DC:About 2W, 24 to 240V DC/AC:About 10VA					
Ambient Temperature		-10℃~+55℃					
Ambient Humidity		35~85%RH					
Weight		100g					
Mounting & Socket	Surface	PF08A-E			PYF113A-E		
	Flush	US-08 or P3G-08			US-11		




## Lh3 Installation dimensions

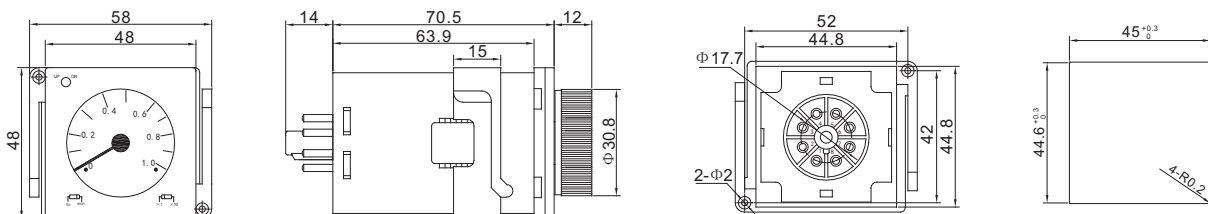




LH3CT Connecting



LH3CT Sequence diagram



LH3BA Connecting

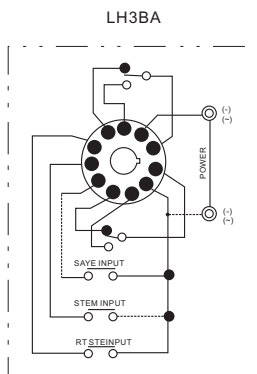

LH3BA Sequence diagram

